







康霸子
KANGBAZ

RoHS

- Specifications:
Operating Voltage:50V
Current Rating: 0.5A
Withstand Voltage: 500V
Contact Resistance:30mΩ
Insulation resistance:500MΩ
Operating Temperature:-20°C~+85°C
- PART NO.

KBF 1.0 - XX D A T J

MOLD NO.
TUBE
HORIZONTAL TOP CONTACT
DIP
CIRCUITS NUMBER 02 TO 40
1.0 mm SPACING
FFC CONNECTOR

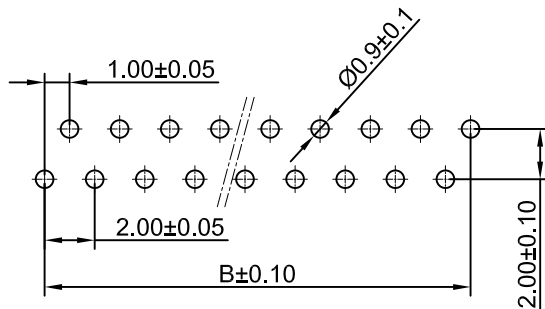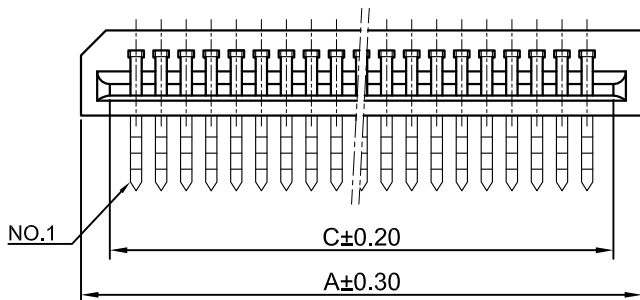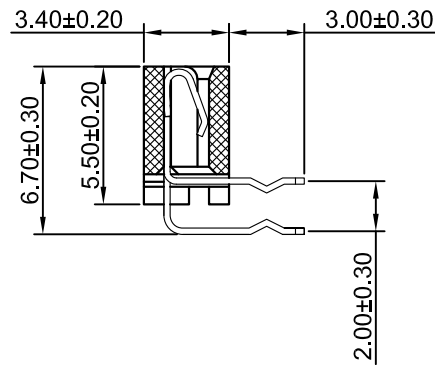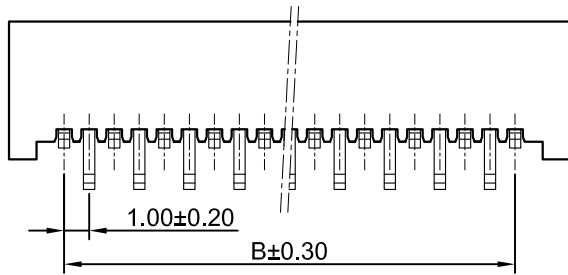

PCB LAYOUT

孔位	A	B	C	孔位	A	B	C
2	5.40	1.00	3.10	22	25.40	21.00	23.10
3	6.40	2.00	4.10	23	26.40	22.00	24.10
4	7.40	3.00	5.10	24	27.40	23.00	25.10
5	8.40	4.00	6.10	25	28.40	24.00	26.10
6	9.40	5.00	7.10	26	29.40	25.00	27.10
7	10.40	6.00	8.10	27	30.40	26.00	28.10
8	11.40	7.00	9.10	28	31.40	27.00	29.10
9	12.40	8.00	10.10	29	32.40	28.00	30.10
10	13.40	9.00	11.10	30	33.40	29.00	31.10
11	14.40	10.00	12.10	31	34.40	30.00	32.10
12	15.40	11.00	13.10	32	35.40	31.00	33.10
13	16.40	12.00	14.10	33	36.40	32.00	34.10
14	17.40	13.00	15.10	34	37.40	33.00	35.10
15	18.40	14.00	16.10	35	38.40	34.00	36.10
16	19.40	15.00	17.10	36	39.40	35.00	37.10
17	20.40	16.00	18.10	37	40.40	36.00	38.10
18	21.40	17.00	19.10	38	41.40	37.00	39.10
19	22.40	18.00	20.10	39	42.40	38.00	40.10
20	23.40	19.00	21.10	40	43.40	39.00	41.10
21	24.40	20.00	22.10				

TOLERANCE
RANGE/公差範圍

.X ±0.30 .X"
.XX ±0.25 .XX"
.XXX ±0.15 .XXX"

RAWN/繪圖

DATE/日期

2024.11.13

CHECK BY/審查

DATE/日期

2024.11.13

APPROVED BY/核准

DATE/日期

2024.11.13

PACKAGE/包裝

TUBE



康霸子

KANGBAZ

FPC 1.0mm PITCH TOP OF CONTACT DIP

PART NO./料號

KBF1.0-XXDATJ

UNIT/單位

MM

MATERIAL/材質

PA46 UL94V-0 COPPER ALLOY

ANGLE OF VIEW/視角



PIN NUMBER/針數

02-40

REV/版本

A