

D

C


B

A


康霸子
KANGBAZ

RoHS


1

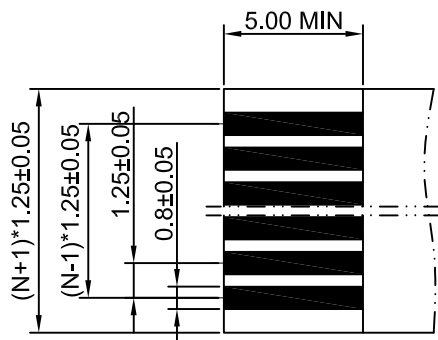RECOMMENDED FPC SPEC
T=0.30±0.02mm


2

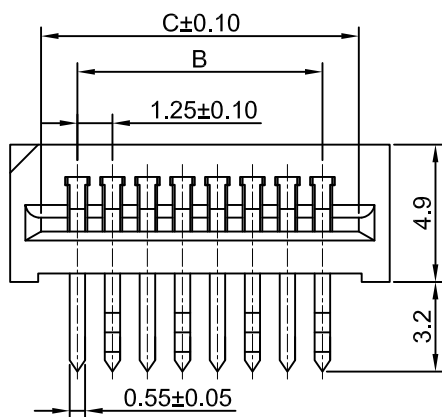

3

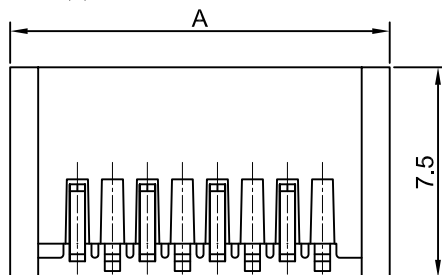

4

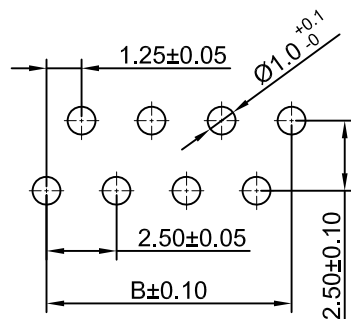


PCB LAYOUT

- Specifications:
Operating Voltage:200V
Current Rating: 1A
Withstand Voltage: 500V
Contact Resistance:30mΩ
Insulation resistance:500MΩ
Operating Temperature:-25°C~+85°C

● PART NO.

KBF 1.25 - XX D W T J

- MOLD NO.
- TUBE
- LYING DOWN
- DIP
- CIRCUITS NUMBER 04 TO 40
- 1.25 mm SPACING
- FFC CONNECTOR

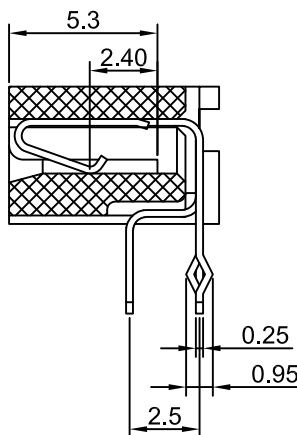

孔位	A	B	C	孔位	A	B	C
4	8.55	3.75	6.35	23	32.30	27.50	30.10
5	9.80	5.00	7.60	24	33.55	28.75	31.35
6	11.05	6.25	8.85	25	34.80	30.00	32.60
7	12.30	7.50	10.10	26	36.05	31.25	33.85
8	13.55	8.75	11.35	27	37.30	32.50	35.10
9	14.80	10.00	12.60	28	38.55	33.75	36.35
10	16.05	11.25	13.85	29	39.80	35.00	37.60
11	17.30	12.50	15.10	30	41.05	36.25	38.85
12	18.55	13.75	16.35	31	42.30	37.50	40.10
13	19.80	15.00	17.60	32	43.55	38.75	41.35
14	21.05	16.25	18.85	33	44.80	40.00	42.60
15	22.30	17.50	20.10	34	46.05	41.25	43.85
16	23.55	18.75	21.35	35	47.30	42.50	45.10
17	24.80	20.00	22.60	36	48.55	43.75	46.35
18	26.05	21.25	23.85	37	49.80	45.00	47.60
19	27.30	22.50	25.10	38	51.05	46.25	48.85
20	28.55	23.75	26.35	39	52.30	47.50	50.10
21	29.80	25.00	27.60	40	53.55	48.75	51.35
22	31.05	26.25	28.85				

TOLERANCE
RANGE/公差範圍

.X ±0.30 .X°
.XX ±0.25 .XX°
.XXX ±0.15 .XXX°

RAWN/繪圖

CHECK BY/審查

APPROVED BY/核准

PACKAGE/包裝

DATE/日期
2024.11.14DATE/日期
2024.11.14DATE/日期
2024.11.14

1,000pcs/TUBE

康霸子
KANGBAZ

1.25mm FPC/FFC CONNECTOR 单面接触

PART NO./料號

KBF1.25-XXDWTJ

UNIT/單位
MMMATERIAL/材質
PBT UL94V-0 磷青铜ANGLE OF VIEW/視角
PIN NUMBER/針數
04-40REV/版本
A