

D

C

B


A



康霸子
KANGBAZ


RoHS

1




RECOMMENDED FPC SPEC
T=0.30±0.02mm


2

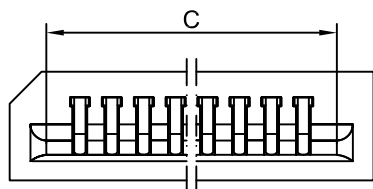

3

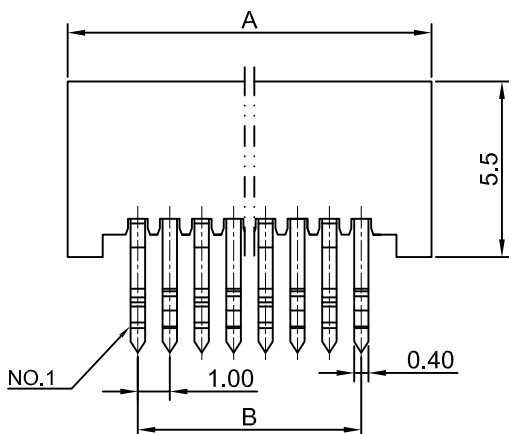

4

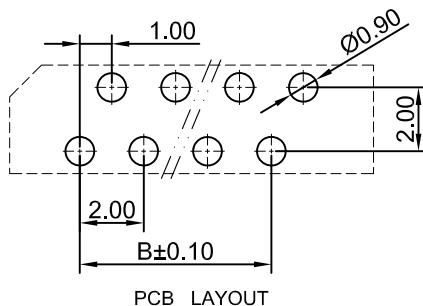


PCB LAYOUT

- Specifications:
Operating Voltage:50V
Current Rating: 0.5A
Withstand Voltage: 500V
Contact Resistance:30mΩ
Insulation resistance:500MΩ
Operating Temperature:-25°C~+85°C

● PART NO.

KBF 1.0 - XX D V T J

MOLD NO.
TUBE
VERTICAL
DIP
CIRCUITS NUMBER 02 TO 40
1.0 mm SPACING
FFC CONNECTOR

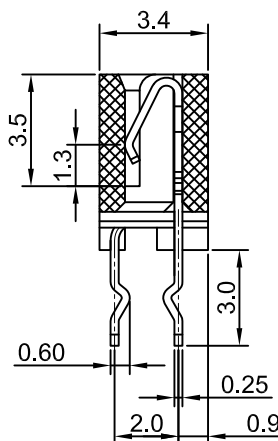

孔位	A	B	C	孔位	A	B	C
2	5,40	1,00	3,10	22	25,40	21,00	23,10
3	6,40	2,00	4,10	23	26,40	22,00	24,10
4	7,40	3,00	5,10	24	27,40	23,00	25,10
5	8,40	4,00	6,10	25	28,40	24,00	26,10
6	9,40	5,00	7,10	26	29,40	25,00	27,10
7	10,40	6,00	8,10	27	30,40	26,00	28,10
8	11,40	7,00	9,10	28	31,40	27,00	29,10
9	12,40	8,00	10,10	29	32,40	28,00	30,10
10	13,40	9,00	11,10	30	33,40	29,00	31,10
11	14,40	10,00	12,10	31	34,40	30,00	32,10
12	15,40	11,00	13,10	32	35,40	31,00	33,10
13	16,40	12,00	14,10	33	36,40	32,00	34,10
14	17,40	13,00	15,10	34	37,40	33,00	35,10
15	18,40	14,00	16,10	35	38,40	34,00	36,10
16	19,40	15,00	17,10	36	39,40	35,00	37,10
17	20,40	16,00	18,10	37	40,40	36,00	38,10
18	21,40	17,00	19,10	38	41,40	37,00	39,10
19	22,40	18,00	20,10	39	42,40	38,00	40,10
20	23,40	19,00	21,10	40	43,40	39,00	41,10
21	24,40	20,00	22,10				

TOLERANCE
RANGE/公差範圍

.X ±0.30 .X°
.XX ±0.25 .XX°
.XXX ±0.15 .XXX°

RAWN/繪圖

CHECK BY/審查

APPROVED BY/核准

PACKAGE/包裝

DATE/日期
2024.02.22

DATE/日期
2024.02.22

DATE/日期
2024.02.22

TUBE



康霸子
KANGBAZ

FPC1.0mm PITCH BOTTOM OF CONTACT DIP

PART NO./料號

KBF1.0-XXDVTJ

UNIT/單位
MM

MATERIAL/材質
PA46 UL94V-0 COPPER ALLOY

ANGLE OF VIEW/視角

PIN NUMBER/針數
02-34

REV/版本
A