



康霸子
KANGBAZ







RoHS

- Specifications:
Operating Voltage:30V
Current Rating: 0.2A
Withstand Voltage: 250V
Contact Resistance:40mΩ
Insulation resistance:50MΩ
Operating Temperature:-55°C~+85°C

● PART NO.

KBFO.3 - XXSBBTJ

MOULD NO.
TUBE
FLIP LOCK
HORIZONTAL BOTTOM CONTACT
SMT
CIRCUITS NUMBER 09 TO 18
0.3 mm SPACING
FFC CONNECTOR

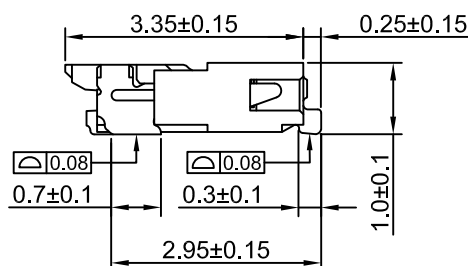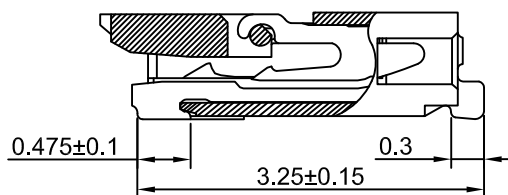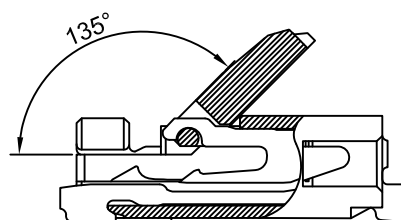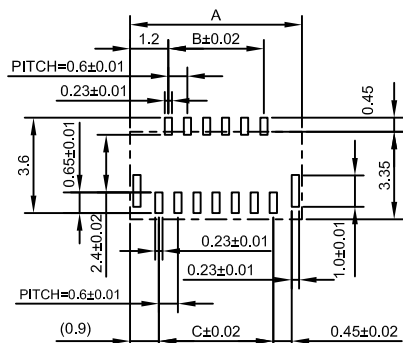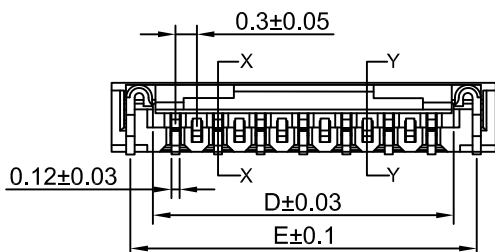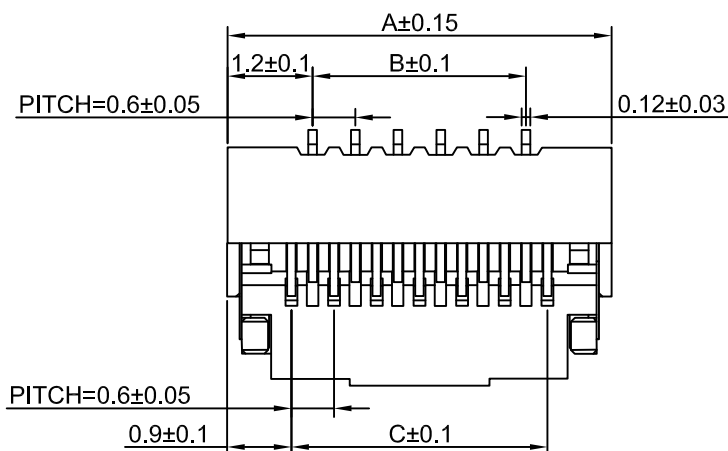

PIN NO.	DIM A	DIM B	DIM C	DIM D	DIM E
09	4.2	1.8	2.4	3.03	3.7
11	4.8	2.4	3.0	3.63	4.3
13	5.4	3.0	3.6	4.23	4.9
15	6.0	3.6	4.2	4.83	5.5
17	6.6	4.2	4.8	5.43	6.1
19	7.2	4.8	5.4	6.03	6.7
21	7.8	5.4	6.0	6.63	7.3
23	8.4	6.0	6.6	7.23	7.9
25	9.0	6.6	7.2	7.83	8.5
27	9.6	7.2	7.8	8.43	9.1
29	10.2	7.8	8.4	9.03	9.7
31	10.8	8.4	9.0	9.63	10.3
33	11.4	9.0	9.6	10.23	10.9

PIN NO.	DIM A	DIM B	DIM C	DIM D	DIM E
35	12.0	9.6	10.2	10.83	11.5
37	12.6	10.2	10.8	11.43	12.1
39	13.2	10.8	11.4	12.03	12.7
41	13.8	11.4	12.0	12.63	13.3
43	14.4	12.0	12.6	13.23	13.9
45	15.0	12.6	13.2	13.83	14.5
49	16.2	13.8	14.4	15.03	15.7
51	16.8	14.4	15.0	15.63	16.3
57	18.6	16.2	16.8	17.43	18.1
61	19.8	17.4	18.0	18.63	19.3
67	21.6	19.2	20.4	20.43	21.1
71	22.8	20.4	21.0	21.63	22.3

TOLERANCE
RANGE/公差範圍

RAWN/繪圖

DATE/日期
2020.06.15



FPC0.3mm PITCH BOTTOM OF CONTACT SMT

STANDARD/一般公差 ±0.2

CHECK BY/審查

DATE/日期
2020.06.15

APPROVED BY/核准

DATE/日期
2020.06.15

PART NO./料號

KBFO.3-XXSBBTJ

UNIT/單位
MM

PACKAGE/包裝

TUBE

MATERIAL/材質
LCP UL94V-0 COPPER ALLOY

ANGLE OF VIEW/視角

PIN NUMBER/針數
09-71

REV/版本
A